
AA107422 Freeway Secura


Safety spray for high pressure!











Undo both sides of the hook and loop strap and place the strap around the tap body. Note that it may be necessary to completely remove the strap from the plastic ring to fit some larger taps.

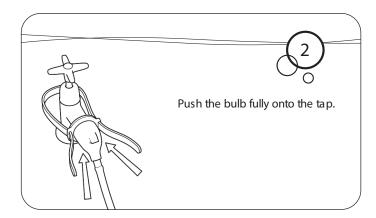


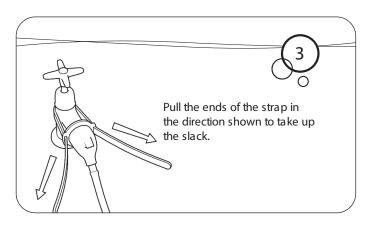

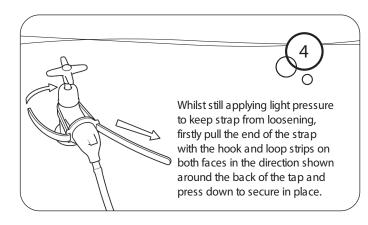

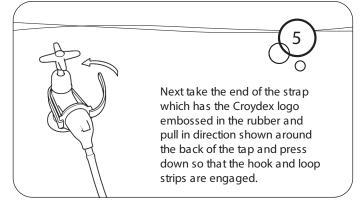

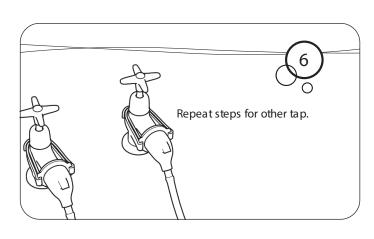



IMPORTANT – Do not pull strap too tight or deformation of the plastic ring will occur which could damage the product and prevent rubber bulb from being securely

AA107422 Freeway Secura

Safety spray for high pressure!





Safety Advice

- 1. This spray is suitable for use with normal household water temperatures. For safety and convenience do not use with water above 65°C or with combined water pressures above 3 bar (43.5psi).
- 2. Always take care when using hot water, especially with children. NEVER leave a child unattended in the bathroom.
- 3. Before fitting please ensure that the tap surfaces have been cleaned to remove any bath oil or soap residue.
- 4. Always turn on the cold water first and then gradually add the hot until the desired temperature is achieved.
- 5. Do not connect directly to water heaters or combination boilers.
- 6. To ensure constant temperature and flow, avoid running cold water from other outlets during use.
- 7. Do not pull or apply excessive tension to the spray.
- 8. This product is designed for use with most standard bath and basin taps.

Freeway Spray Operation

