




INSTALLATION MANUAL

Basin Waste

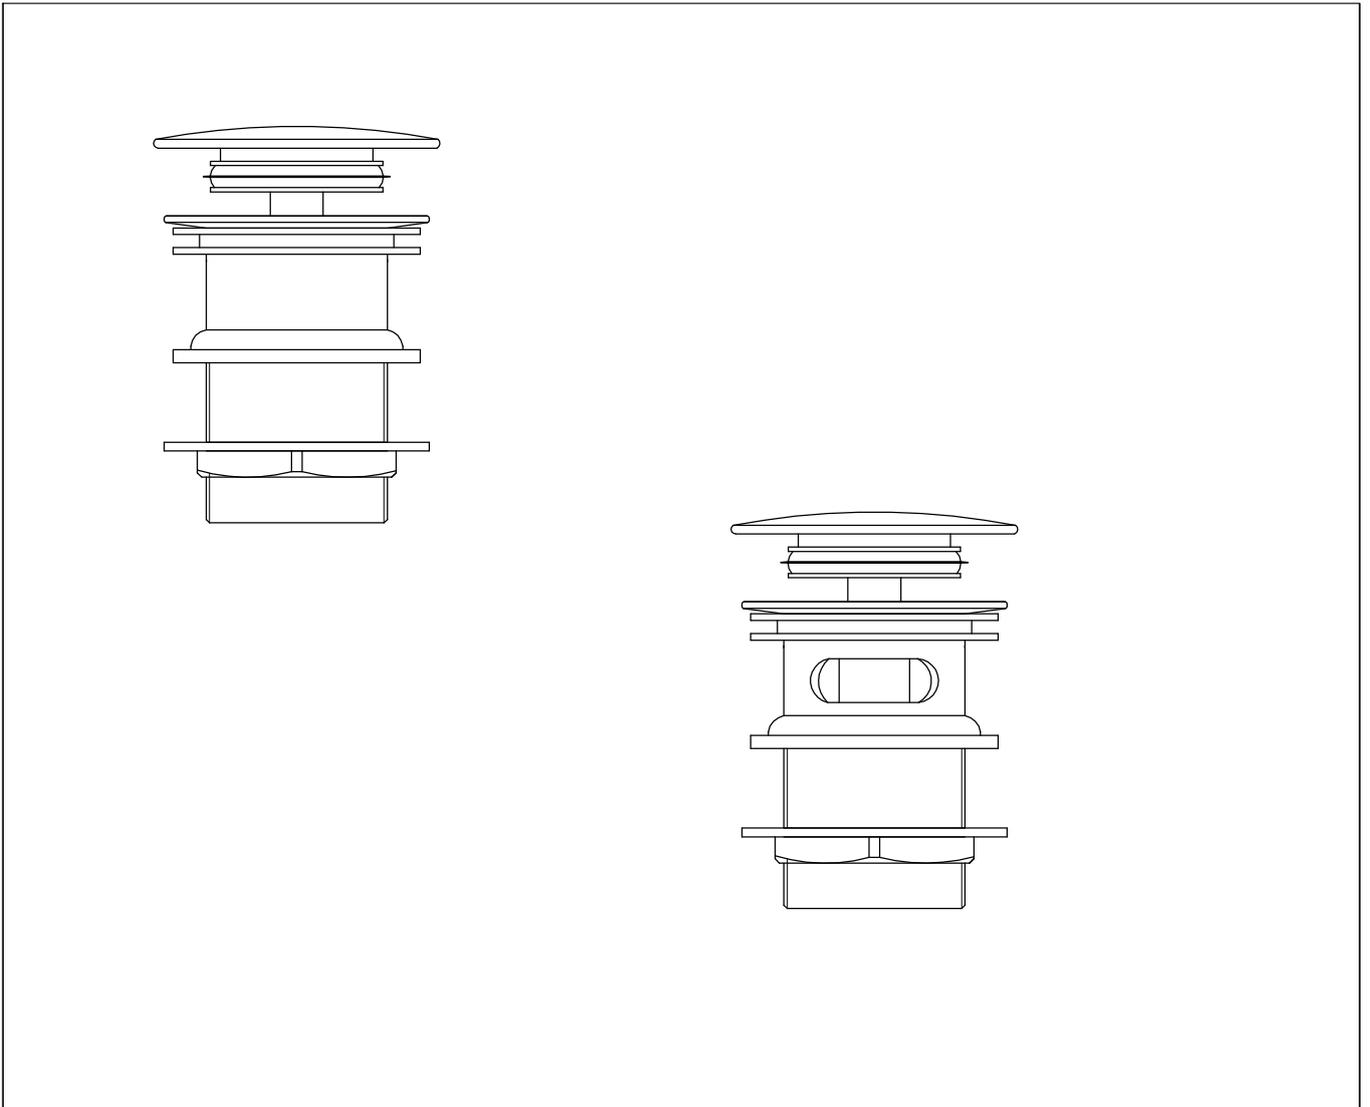

VURTU is registered trade mark of Kinen UK Limited.
the company reserves the right to alter product
specifications without notice

1. NOTES FOR INSTALLATION


 **Warning:** Please read all the instructions completely before proceeding.

2. SHUT OFF WATER SUPPLY


Locate water supply inlets and shut off the water supply valves. These are usually found under the sink or near the water meter.

3. INSTALLATION

Slotted Basin Waste

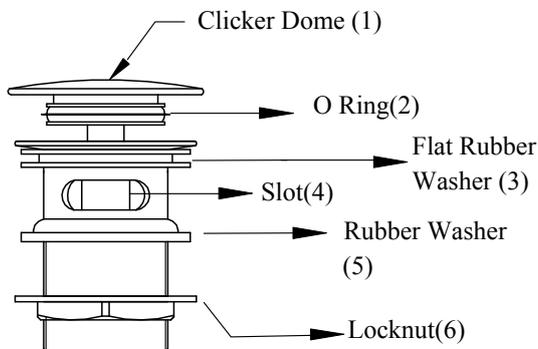

1. Unscrew the locknut (6) and remove the rubber washer (5).
2. Install the waste above the basin with the flat rubber washer (3) and make sure the slot (4) lines up with the overflow on the basin.
3. Fasten the waste with locknut (6) and the rubber washer (5).
4. To fill the basin, the Clicker mechanism requires pressing down on the clicker dome (1), and pressing it again to release the water.
5. Check all the joints for leaks.

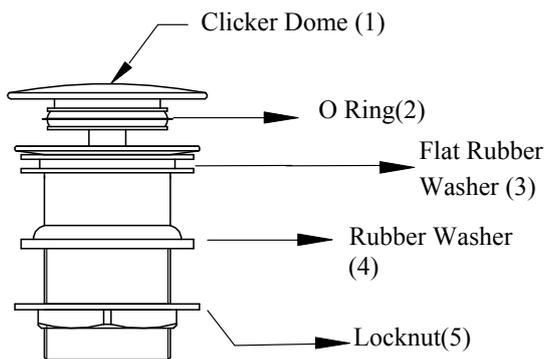

1. Unscrew the locknut (5) and remove the rubber washer (4).
2. Install the waste above the basin with the flat rubber washer (3)
3. Fasten the waste with locknut (5) and the rubber washer (4).
4. To fill the basin, the Clicker mechanism requires pressing down on the clicker dome (1), and pressing it again to release the water.
5. Check all the joints for leaks.

4. CLEANING INSTRUCTIONS

For all decorative finishes, use only a soft damp cloth to clean and shine. Use of polish, detergents, abrasive cleaners, organic solvents or acid may cause damage. Use of other than a soft damp cloth will nullify our warranty.

