

GAINSBOROUGH™


BAR MIXER COOL TOUCH SHOWER

ALL SYSTEMS



.....

DIMENSIONAL DRAWINGS

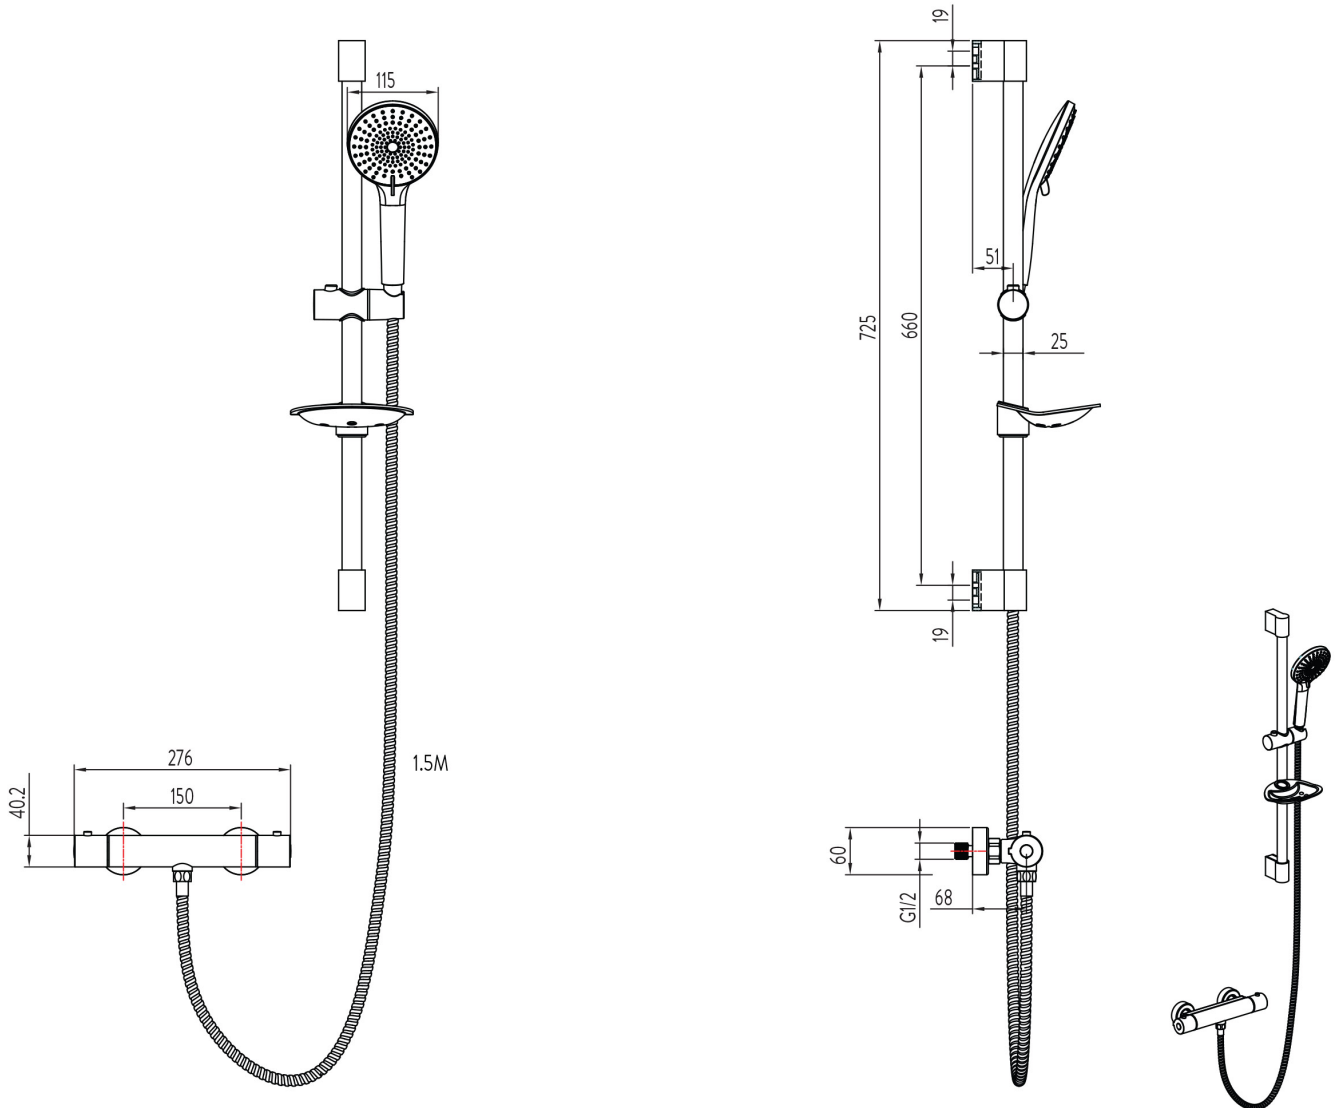



GAINSBOROUGH™

BAR MIXER COOL TOUCH SHOWER

HP/COMBI



GSRP

TECHNICAL SPECIFICATIONS

Minimum pressure requirements	1 Bar
Maximum pressure requirements	5 Bar
Inlet fitting connections	3/4" Threaded
Rear inlet supply positions	Hot/left, cold/right (as viewed from the front)
Hose connection	1/2" Thread
Valve inlet centres	150mm centres
Supply temperature	Hot Water Maximum: 65°C. Cold Water Minimum: 5°C
Water system	Combination boiler, balanced high pressure and gravity boosted (pumped) systems
Features	Thermostatic temperature control with override button for extra safety
	Cool touch plastic valve with chrome plated stainless steel casing
	Soap dish
	Includes offset inlet elbow to accommodate pipe centres 132mm - 168mm
	Soft rub shower head nozzles for easy cleaning
	Rail height: 725mm
	Adjustable height push button handset holder
	115mm handset: 3 spray patterns
1.5m chrome plated stainless steel hose	
Colour	Chrome
Guarantee period	5 years parts & 2 years labour (heads, hoses, holders & rails covered for 2 years only)